



Family: Valley | Item No. 4705 VK/BN



Drawing 1 - Assembly




## ▼ start here

1

1. Find a clear area in which you can work.
2. Unpack fixture and glass from carton.
3. Carefully review instructions prior to assembly.

**\*\*\* The construction of this fixture will be accomplished by first assembling the main body of the fixture, making all necessary electrical connections, hanging the fixture from the ceiling, and then installing the fixture glass.**

Drawing 2 - Glass Installation

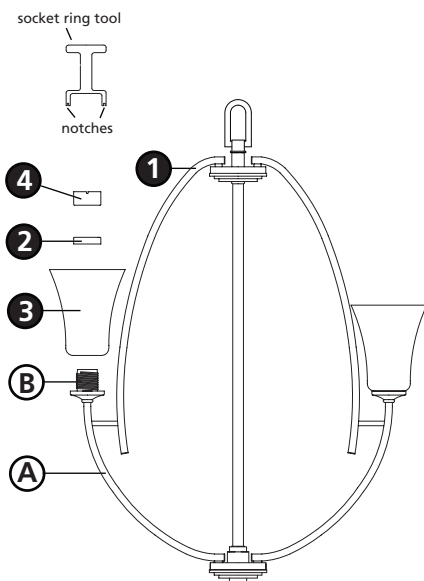

2

**SAFETY WARNING: READ WIRING AND GROUNDING INSTRUCTIONS (I.S. 18) AND ANY ADDITIONAL DIRECTIONS. TURN POWER SUPPLY OFF DURING INSTALLATION. IF NEW WIRING IS REQUIRED, CONSULT A QUALIFIED ELECTRICIAN OR LOCAL AUTHORITIES FOR CODE REQUIREMENTS.**

3

1. To assemble main body, spread arms (A) located on the main body assembly (1), until they are equally spaced 72 degrees apart - see **Drawing 1**.
2. Please refer to the hanging instruction sheet (I.S. 19) provided to hang fixture. Then refer back to this sheet to install glass.

4

1. To install glass, remove socket ring (4) and spacer (2) from socket (B) - see **Drawing 2**.
2. Slip glass (3) over socket (B).
3. Slip spacer (2) and then thread socket ring (4) onto socket (B) to secure glass (3).
4. Use socket ring tool to tighten socket ring (4). Notches in socket ring fit into notches on socket ring tool. Tighten socket ring until snug. Do not overtighten.
5. Repeat step 1-3 for remaining glass.
6. Fixture can now be lamped accordingly.

Note: Maximum wattage for 4705 fixture is 100 watts per bulb.

4.9.10